



Universal Flanged Gaskets

Improved Reliability, Easy Alignment



FEATURES & BENEFITS:

- The Hypro Universal Flanged Gasket aligns adjoining fittings and holds itself in place during joint assembly without the use of adhesives
- Alignment ribs stiffen the T-web and mark 0°, 45° and 90° for rotational alignment of fittings
- The outside of the gasket is visible for inspection during assembly to ensure gasket is properly placed
- Visibility allows for 100% inspection to prevent leaks and costly rework
- Sealing areas between fitting faces increase maximum pressure and vacuum the joint can manage without leaks
- The T-web secures the seal so that it cannot be sucked into the joint by normal pump suction
- Gasket “bulge” into the joint is minimized, increasing the flowable area up to 28%, while reducing turbulence and ensuring maximum flow


Part Numbers	Size	Gasket Type
UFG0100E	1"	EPDM
UFG0150E	1.5"	EPDM
UFG0200E	2" (full port)	EPDM
UFG0300E	3"	EPDM



The Universal Flange Gasket's unique T-web feature aligns the two adjoining fittings, while securely holding the gasket in place, reducing assembly time.



Universal Flange Gaskets work with all flanged sprayer fittings and pumps, including Hypro's 9306 3" x 2" full-port, flanged centrifugal pumps.

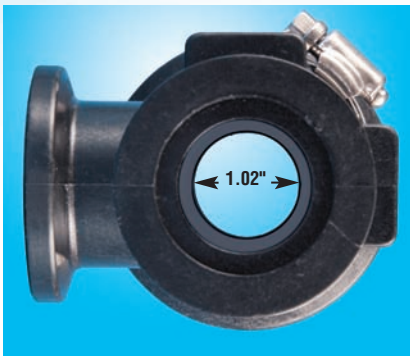

Hypro Universal Gasket (less restrictive)



Standard Gasket (more restrictive)



Pentair

SPRAY & INJECTION TECHNOLOGIES GROUP

375 Fifth Avenue NW • New Brighton, MN 55112
Phone: (651) 766-6300 • 800-424-9776 • Fax: 800-323-6496
www.hypropumps.com