



HYPRO®

SPRAY PRODUCTS

9306 Series Centrifugal Pumps

High Performance and High Efficiency Pumps



Now available with 300 x 220 universal flanged ports in both cast iron and stainless steel.



Life Guard™ silicon carbide seal comes standard in all stainless steel models and is available as an option in cast iron models.


FEATURES & BENEFITS:

- High efficiency volute casing consumes as much as 5.5% less horsepower than previous 9304 series pumps
- Improved flow design in the periphery of the volute casing creates high performance output with reduced shaft loading
- Availability of both cast iron and stainless steel materials allows for flexibility in pump selection
- Cast iron models come equipped with stainless steel wear rings for extended life in normal chemical spraying applications
- 316 stainless steel models come equipped with Life Guard™ silicon carbide mechanical seals and are available where more protection is required for pumping highly corrosive spray solutions
- The most robust hydraulic motor in the crop spraying industry significantly reduces downtime and increases spraying days
- Retrofits into most 9304 series installations for easy conversions
- Available with universal flanged ports (300 x 220 or 220 x 220) for quicker installation and serviceability (220 x 220 only available on cast iron models)


9306 Series Centrifugal Pumps

SPECIFICATIONS


9306C-HM1C, 9306S-HM1C & 9306C-HM1C-U

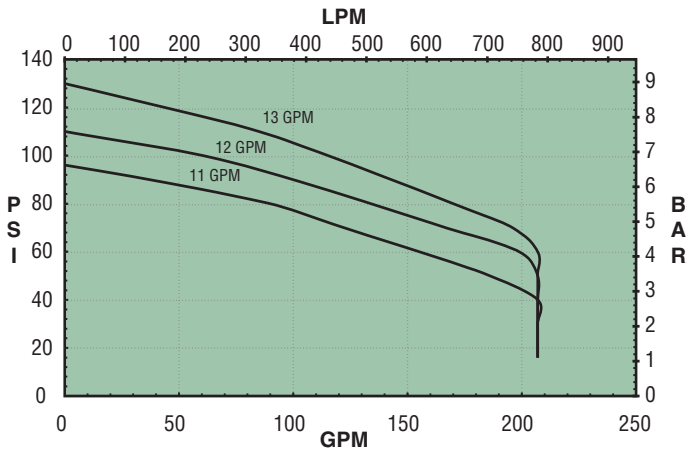


9306C-HM1C-3U & 9306S-HM1C-3U

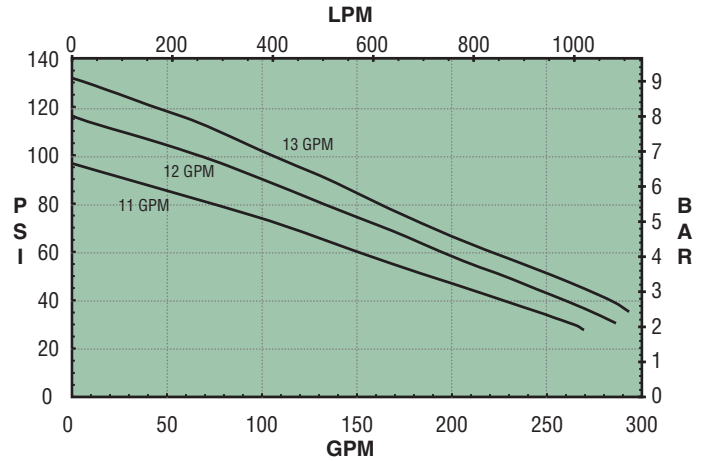


9306C-HM3C, 9306S-HM3C & 9306C-HM3C-U

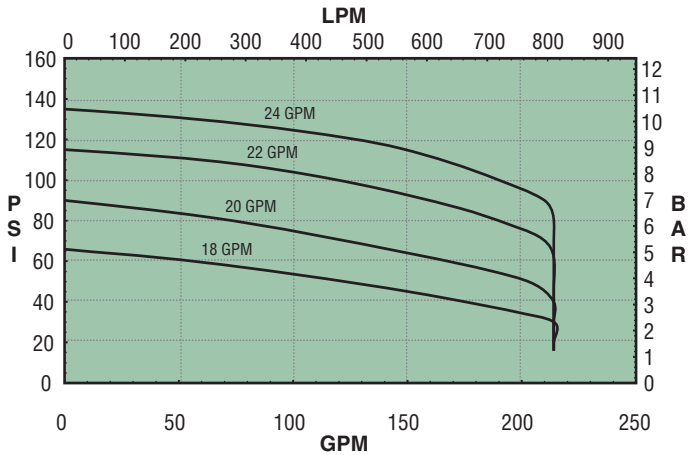


9306C-HM3C-3U & 9306S-HM3C-3U

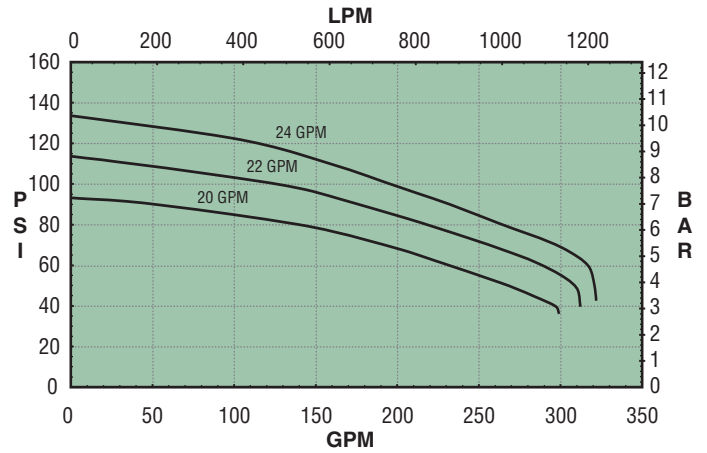

9306C-HM5C, 9306S-HM5C & 9306C-HM5C-U

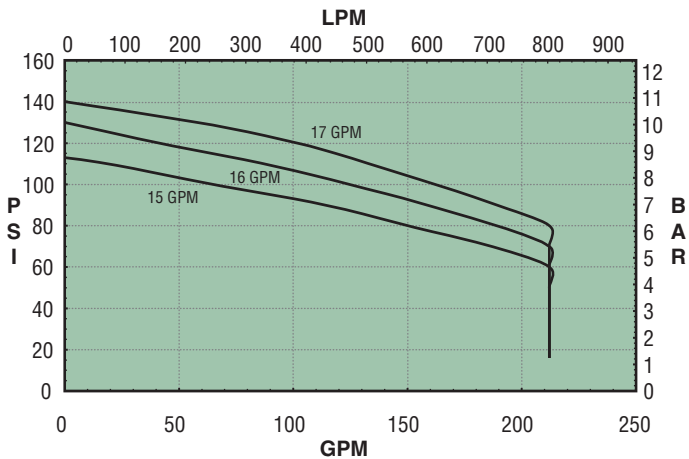

9306C-HM5C-3U & 9306S-HM5C-3U

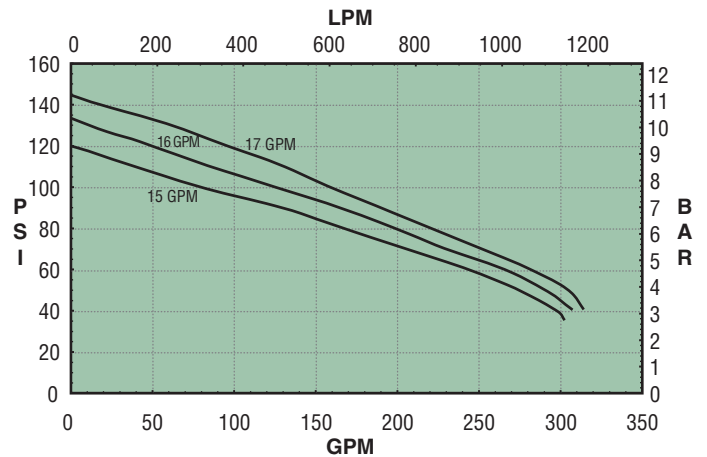

Pentair Water

FLOW TECHNOLOGIES GROUP

375 Fifth Avenue NW • New Brighton, MN 55112

Phone: (651) 766-6300 • 800-424-9776 • Fax: 800-323-6496

www.hypropumps.com