



# HYPRO®

SPRAY PRODUCTS

## Universal Flanged Gaskets

*Improved Reliability, Easy Alignment*



Patent Pending

### FEATURES & BENEFITS:

- The Hypro Universal Flanged Gasket aligns adjoining fittings and holds itself in place during joint assembly without the use of adhesives
- Alignment ribs stiffen the T-web and mark 0°, 45° and 90° for rotational alignment of fittings
- The outside of the gasket is visible for inspection during assembly to ensure gasket is properly placed
- Visibility allows for 100% inspection to prevent leaks and costly rework
- Sealing areas between fitting faces increase maximum pressure and vacuum the joint can manage without leaks
- The T-web secures the seal so that it cannot be sucked into the joint by normal pump suction
- Gasket “bulge” into the joint is minimized, increasing the flowable area up to 28%, while reducing turbulence and ensuring maximum flow



*The Universal Flange Gasket's unique T-web feature aligns the two adjoining fittings, while securely holding the gasket in place, reducing assembly time.*




*Universal Flange Gaskets work with all flanged fittings and pumps, including Hypro's new 9306 3" x 2" full port flanged centrifugal pumps.*


# Universal Flanged Gaskets

## SPECIFICATIONS

The Hypro Universal Gasket eliminates gasket “bulge” into the joint. This protects plumbing efficiency by increasing the flowable area up to 28% over standard gaskets.

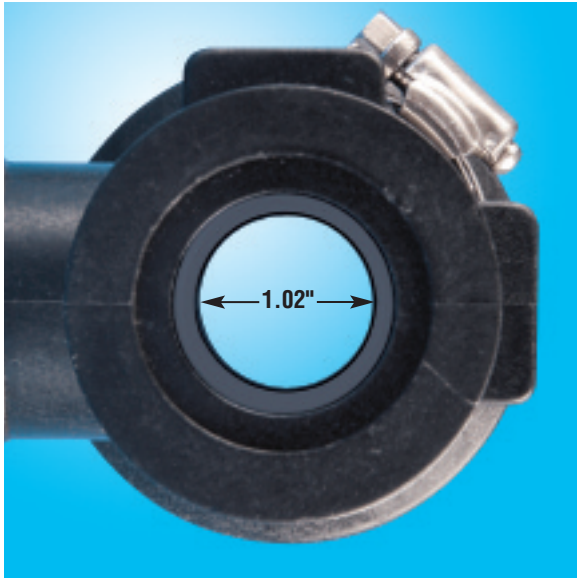

Hypro Universal Gasket (less restrictive)

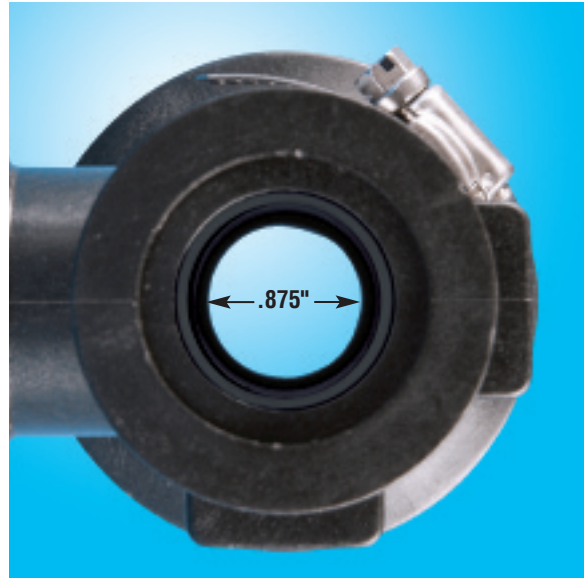

Standard Gasket (more restrictive)

Part Numbers	Size	Gasket Type
UFG0100E	1"	EPDM
UFG0150E	1.5"	EPDM
UFG0200E	2"	EPDM
UFG0300E	3"	EPDM



**Pentair Water**

**FLOW TECHNOLOGIES GROUP**

375 Fifth Avenue NW • New Brighton, MN 55112

Phone: (651) 766-6300 • 800-424-9776 • Fax: 800-323-6496

[www.hypropumps.com](http://www.hypropumps.com)