


# Hydraulically-Driven Pressure Washers

Offering 3-4 gpm Cleaning Power

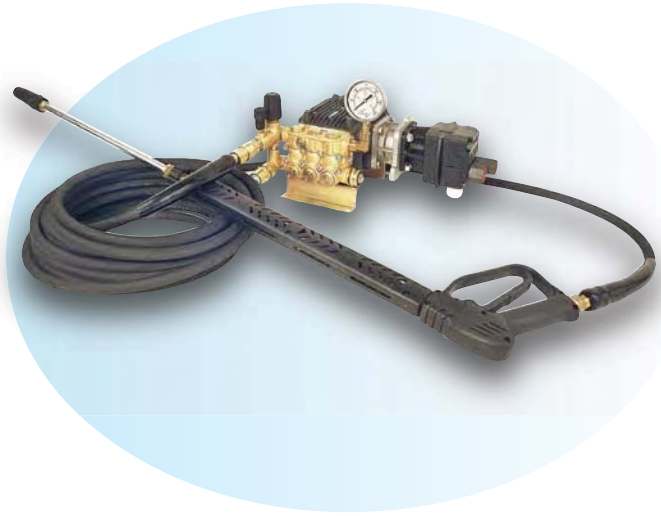

## FEATURES & BENEFITS

- Anodized, die-cast aluminum crankcase
- Heavy-duty, corrosion-resistant brass manifold
- One-piece, forged-bronze connecting rods
- Stainless steel valves
- Hardened, stainless steel piston guides
- Solid ceramic plungers
- High pressure and low pressure packings of high-quality buna textile
- Heavy-duty, ball bearing supported crankshaft
- Sight glass and oil-level dipstick

The hydraulically-driven pressure washers are ideally suited for remote and explosion-proof environments where electricity cannot be used. These models are equipped with a hydraulic motor-driven, triplex plunger pump; and include an unloader, gauge, and quick disconnect. Some models include a chemical injector, 50' pressure wash hose, trigger gun and insulated wand with adjustable Hi-Lo and Variable-Angle cleaning nozzle. Certain models are also equipped with a chemical injector. See chart below for details.

Model Number	Max		Hydraulic Motor Requirements		Description	Weight	
	GPM	PSI	GPM	PSI		LBS	KG
	LPM	BAR	LPM	BAR			
1802C*	3.0	1000	5.0	1300	Forged Brass Head Triplex Pumps with hydraulic motor, adjustable unloader, gauge, 1/2" NPT input, 3/8" quick disconnect output	38	
	11.4	68.9	18.9	89.6		17.2	
1803C	3.0	1000	5.0	1300		28	
	11.4	68.9	18.9	89.6		12.7	
1804C*	3.0	1500	8.0	1900	Forged Brass Head Triplex Pumps with hydraulic motor, chemical injector, adjustable unloader, gauge, 3/4" GH input, 3/8" quick disconnect output	41	
	11.4	103.4	30.3	131.0		18.6	
1805C	3.0	1500	8.0	1900		26	
	11.4	103.4	30.3	131.0		11.8	
1806C*	3.0	2000	11.0	1300		41	
	11.4	137.9	41.6	89.6		18.6	
1807C	3.0	2000	11.0	1300		26	
	11.4	137.9	41.6	89.6		11.8	
1824C*	4.0	1500	8.5	2000		49	
	15.1	103.4	32.2	137.9		22.2	
1825C	4.0	1500	8.5	2000	33		
	15.1	103.4	32.2	137.9	14.9		
1826C*	4.0	2000	8.5	2000	49		
	15.1	137.9	32.2	137.9	22.2		
1827C	4.0	2000	8.5	2000	33		
	15.1	137.9	32.2	137.9	14.9		

\*Includes 50 ft. hose and gun assembly.